

# 3G-SDI to HDMI/Audio Converter


## VC480

The VC480 3G/HD/SD SDI to HDMI Converter provides a professional way to exchange high definition signals in real time. The SDI and HDMI signal conversion is 100% digital and guarantees no loss of quality for both the audio and video transmission. The VC480 is the most dependable way to convert signals with confidence when monitoring in any post or broadcast application.



## Features

- Converts an 3G/HD/SD-SDI input signal to HDMI formats in real time while avoiding transformation loss for both audio and video signals
- Supports additional analog stereo audio and coaxial digital audio
- HDMI (Deep Color)
- LED indication of power and signal status
- Supports an SDI distance of up to 90M (3G-SDI), 150M (HDSDI) or 300M (SD-SDI) of RG6
- Supported SDI formats:
  - SD-SDI (SMPTE 259M, up to 270Mbps)
  - HD-SDI (SMPTE 292M, 296M, up to 1.485Gbps)
  - 3G-SDI (SMPTE 424M, 425M level A,B, up to 2.97Gbps)
- Video support:
  - 525i@59.96, 625i@50
  - 720p@23.98/24/25/29.94/30/50/59.94/60
  - 1080i@50/59.94/60
  - 1080p@23.97/24/25/29.97/30/50/59.94/60
- Buffered loop-through output provides extended monitoring
- Supports PCM Audio 8 channels @48kHz sampling rate
- Features automatic detection of 3G/HD/SD-SDI signals
- Reclocking SDI signals for cascading and thus longer transmission
- Locking power connector for secure communications

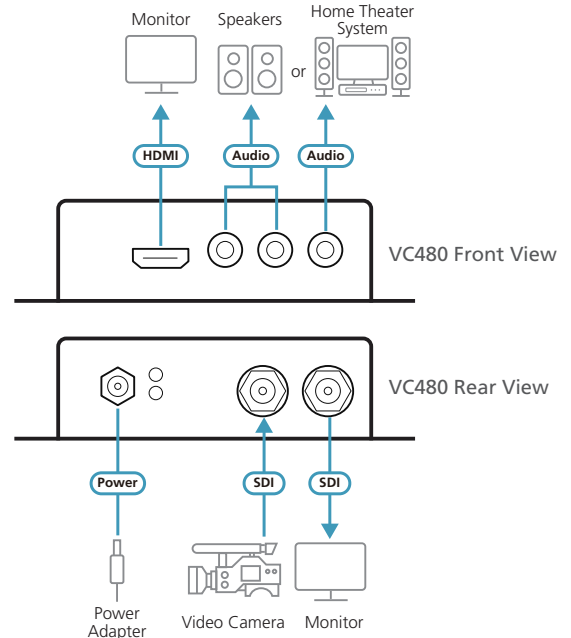

## Specifications

	VC480
<b>Video Input</b>	
Interfaces	1 x BNC (Gold)
Impedance	75 Ω
<b>Video Output</b>	
Interfaces	1 x HDMI Type-A Female (Black); 1 x BNC (Gold)
Impedance	100 Ω
Max. Distance	15m at 1920x1080@60 (4:4:4) - HDMI
<b>Video</b>	
Max. Data Rate	2.97 Gbps
Max. Pixel Clock	148.5 MHz
Supported Resolutions	NTSC@59.96 Hz, PAL@50 Hz; 720p@50/59.94/60 Hz; 1080i@50/59.94/60 Hz; 1080p@23.97/24/25/29.97/30/50/59.94/60 Hz
Max. Distance	90m (3G-SDI); 150m (HD-SDI); 300m (SD-SDI)
<b>SDI Formats</b>	SD-SDI (SMPTE 259M, up to 270 Mbps) HD-SDI (SMPTE 292M, 296M, up to 1.485 Gbps) 3G-SDI (SMPTE 424M, 425M level A, up to 2.97 Gbps)
<b>Audio</b>	
Output	Analog: 2 x RCA (Red/White) Digital: 1 x RCA (Yellow)
Audio Formats	Input: SDI PCM 2/5.1/7.1 Channel @48kHz sampling rate Output: PCM 2 Channel (Analog/Digital)
<b>Connectors</b>	
Power	1 x DC Jack
<b>Power Consumption</b>	DC5V:3.635W
<b>Environmental</b>	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	20 – 90% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	0.29 kg
Dimensions (L x W x H)	12.30 x 10.87 x 3.05 cm

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 06/2024 V4.0

© Copyright 2024 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.  
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

