




VHS184K 1X8 4K HDMI SPLITTER

Eight Screens Synchronized Display

Support 1 HDMI signal input, 8 monitors or projectors
for simultaneous display ultra-high-definition visual
experience

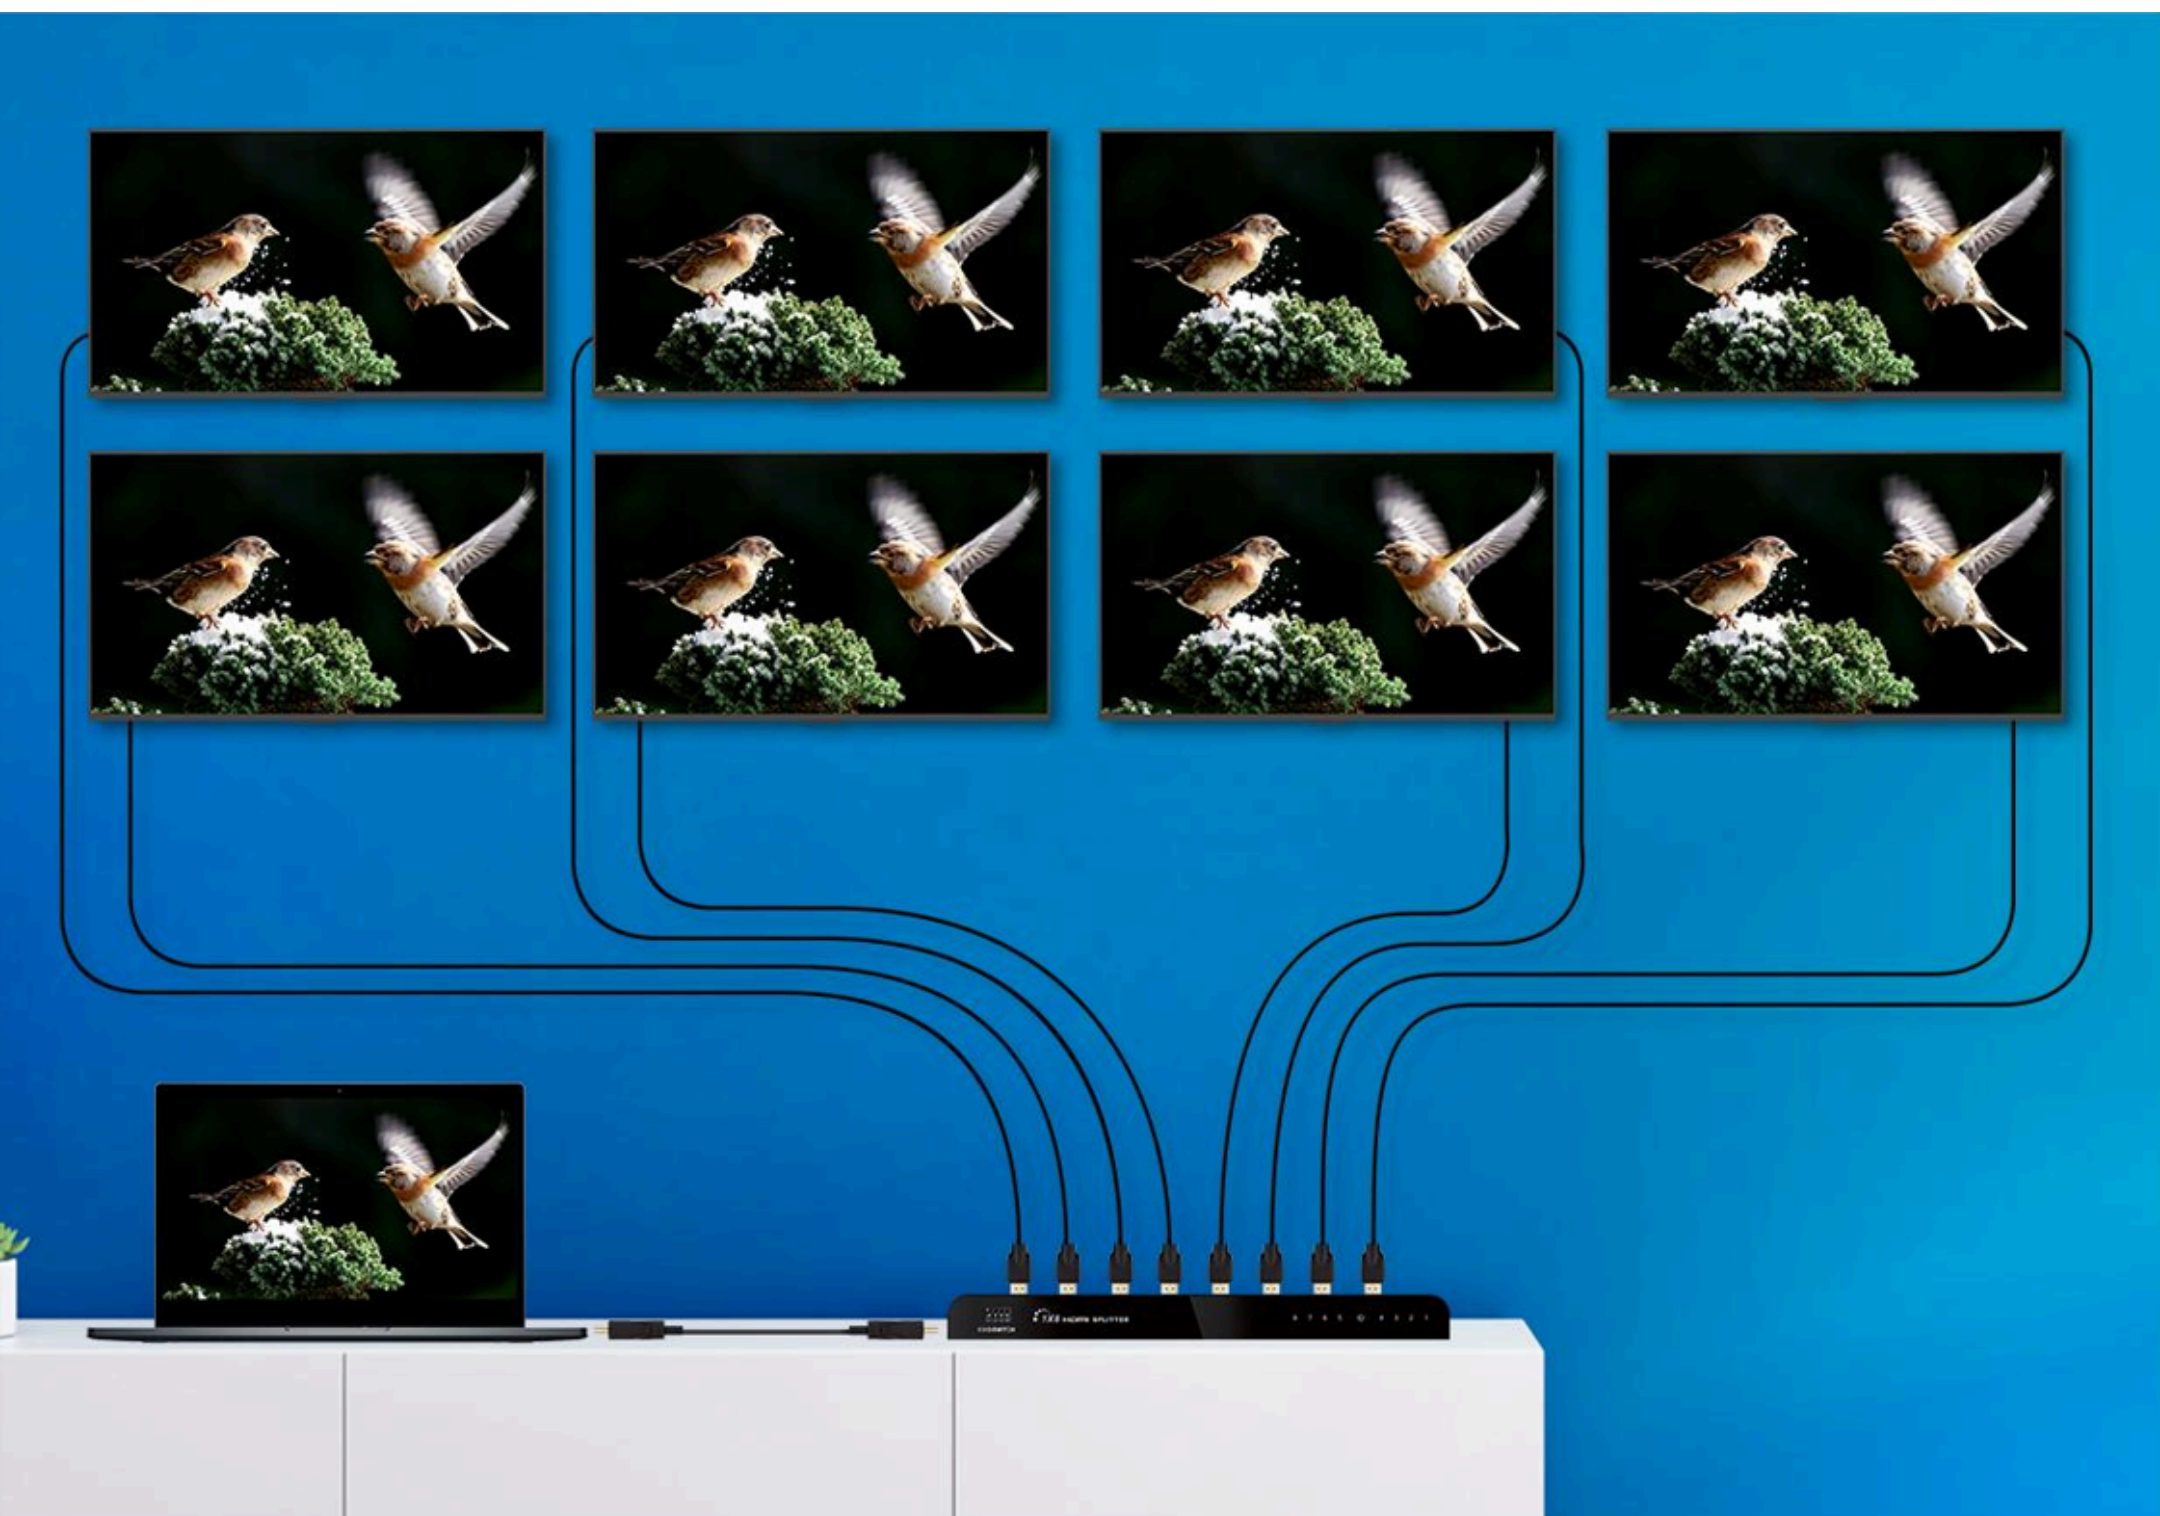



4K 60Hz HDR UHD Picture Quality


Support 4K Ultra HD resolution, rich color reproduction,
vivid and delicate picture

4K HDR




Intelligent EDID Management

According to the EDID information of the display, it automatically matches and outputs the best display resolution, and can output 4K and 1080P signals at the same time

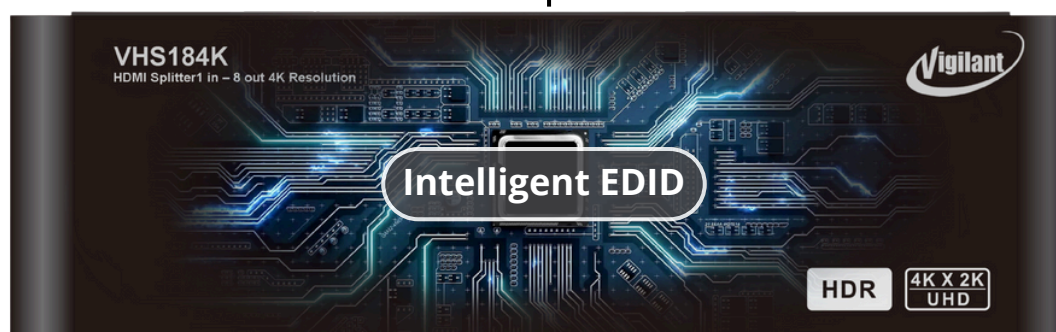

Connection

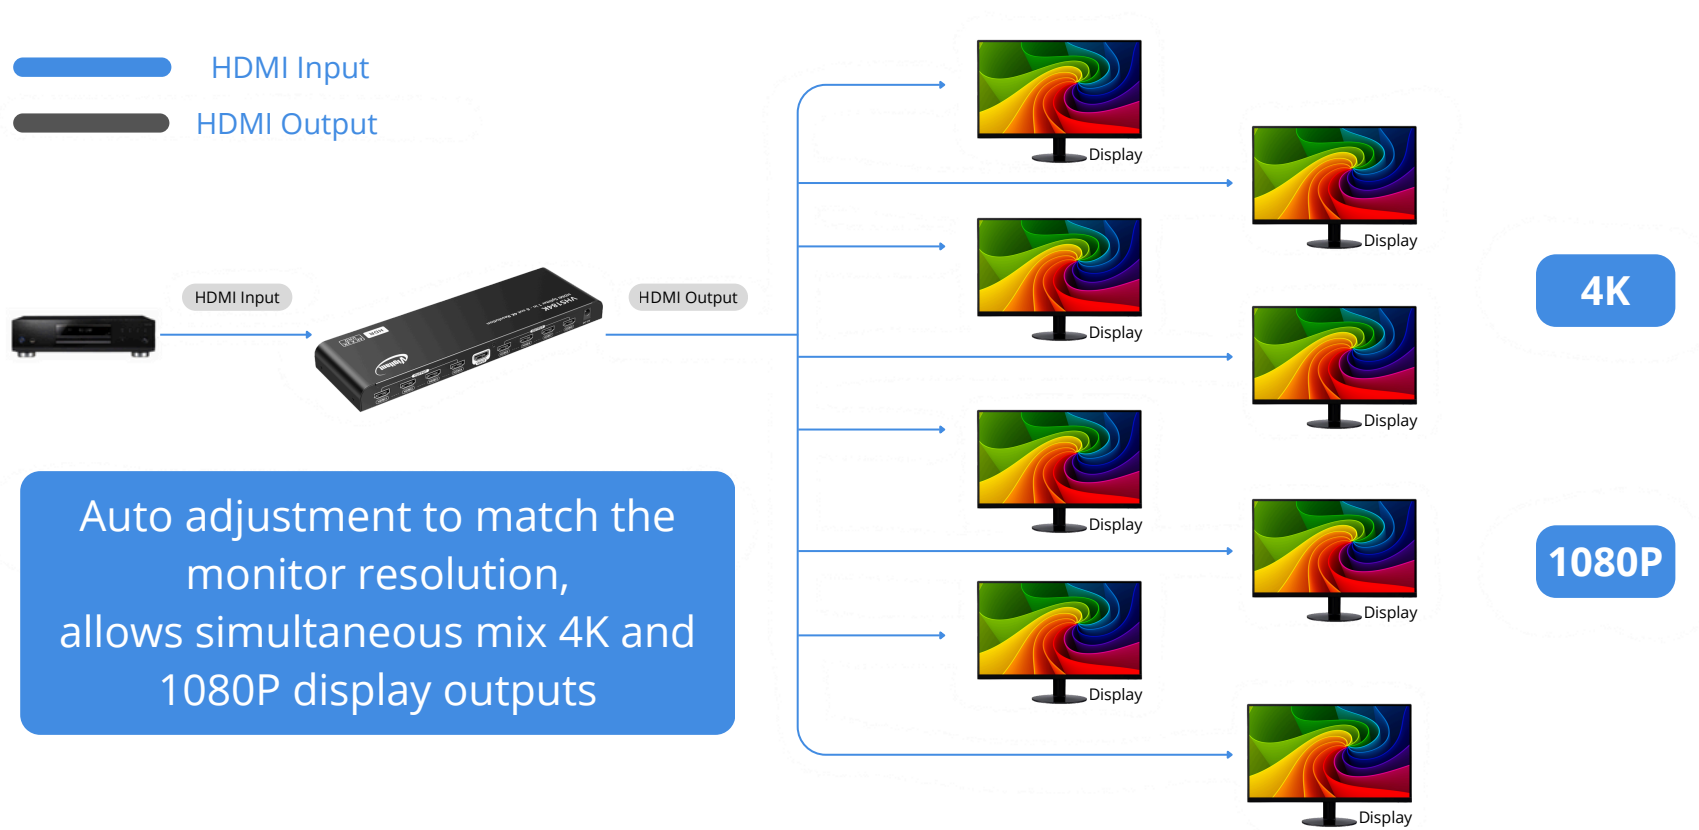



Spesification

Part No.	VHS184K
Technical	
Input	HDMI×1(Type A, 19 pin, female)
Output	HDMI×8(Type A, 19 pin, female)
Input cable length	≤5m(AWG26 HDMI cable support HDMI2.0)
Output cable length	≤5m(AWG26 HDMI cable support HDMI2.0)
Video support	480i@60Hz、 480p@60Hz、 576i@50Hz、 576p@50Hz、 720p@50/60Hz、 1080i@50/60Hz、 1080p@50/60Hz、 4K×2K@24/25/30/60Hz
Audio format	Support standard audio and DSD (Direct Stream Digital) and HD(HBR) audio
TMDS signal	0.5~1.5Vp-p(TMDS)
DDC signal	5Vp-p(TTL)
EDID DIP Switch	Yes
HDR	Yes
HDCP	HDCP2.2
Mechanical	
Housing	Metal enclosure
Dimensions(L×W×H mm)	260×90×21mm
Net weight	453g
Power supply	5V/3A
Power consumption	<13W
Operation temperature	0~60°
Storage temperature	−20~70°
Relative humidity	20-90% (no condensation)