



FC CE UK CA

REACH

TAA COMPLIANT

### Benefits

- ▶ 1U 17" LED-backlit LCD console drawer
- ▶ 1280 x 1024 native resolution / 16.7M colors
- ▶ 104-key USB keyboard with touchpad
- ▶ Short depth design of 460mm
- ▶ One Man installation design
- ▶ New enhanced aesthetics with molded front handle
- ▶ TAA Compliant

### Product Specifications

Console Port	
Video input	VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2

LED-backlit LCD Panel	
Panel size ( diagonal )	17"
Native resolution	1280 x 1024
Brightness ( cd/m <sup>2</sup> )	250
Contrast ratio ( typ. )	1000 : 1
Colors	16.7 M
Viewing angle ( L/R/U/D )	85/85/80/80
Response time ( ms )	5
Dot pitch ( mm )	0.264
Display area ( mm )	337.92H x 270.33V
Surface treatment	Haze 25%, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Physical	
Product ( W x D x H )	442 x 460 x 44 mm 17.4 x 18.1 x 1.73 inch
Packing ( W x D x H )	590 x 815 x 140 mm 23.2 x 32.1 x 5.5 inch
Net weight	12 kg / 26.4 lb
Gross weight	16.6 kg / 36.5 lb



\* All dimensions stated are subject to change if options are selected / integrated to base model part codes

### Standard Keyboard

**Ge** G keyboard with touchpad



U.S.

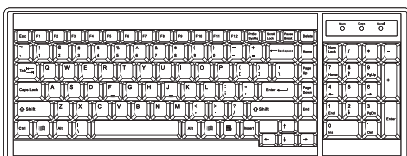

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 22W
	Power saving mode	Max. 2W
	Power button off	Max. 1W

Mounting Distance	
	470 ~ 700 mm 18.5 ~ 27.6 inch

Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 65°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration ( 11ms duration )
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC, CE
Safety	CE / LVD, UKCA
Environment	REACH & RoHS3 / WEEE